

4800 Series

Ultra-fast Responding, Compact, Thermal Mass Flow Controllers & Meters

The 4800 Series of mass flow controllers and mass flow meters features a broad flow range, compact size, a variety of analog and digital I/O options, a MEMS-based sensor that provides lightning fast response times, and many other benefits for a variety of applications. Fully RoHS compliant, the 4800 Series is an excellent choice for measurement and control of many common gases including air, N₂, O₂, Ar, He, H₂, CO₂, CO, N₂O, CH₄, C₃H₆ (Propene), and C₃H₈. The optional Local Operator Interface (LOI) provides a convenient user interface to view, control, and configure the 4800 Series devices eliminating the need for remote secondary electronics.



Features

Benefits

Fast Response Time	Ensures rapid step during process recipe changes
Compact Size	Reduces space and eases installation
Optional Local Operator Interface (LOI)	Provides a turnkey solution for local indication, set point control and device configuration eliminating the need for remote secondary electronics
Low Pressure Drop Across the Sensor	Provide flow measurement with minimal pressure budget
Variety of Analog and Digital I/O	Easily aligns with user requirements
Fully RoHS Compliant	Meets emerging environmental requirements

Product Specifications

Performance

Full Scale Flow Range	50 ml/min - 40 l/min (50 sccm - 40 slpm) (N ₂ eq., at 0°C Ref, with typical 50 psid pressure differential)
Control Range	2 - 100%
Flow Accuracy	±3.0% of F.S., ±1.0% F.S. optional
Flow Repeatability	±0.15% of F.S.
Response Time	Flow Signal: <0.3 sec Flow Control: Settling time <0.75 sec from 0 to 100% F.S. (typical <0.5 sec for all steps)
Temperature Coefficient	±0.1% of F.S./°C (N ₂)

Ratings

Gases	Air, N ₂ , O ₂ , Ar, He, H ₂ , CO ₂ , CO, N ₂ O, CH ₄ , C ₃ H ₆ (Propene), C ₃ H ₈ (other gases upon request)
Operating Limits	Pressure 0 - 10 barg (0 - 150 psig) Temperature 0 - 50°C Humidity 5 to 95% R.H. (ambient)
Differential Pressure Range (Controllers)	2000 Torr
Leak Integrity	45 psid max

Mechanical

Materials of Construction	Wetted parts: stainless steel, fluoroelastomers, silicon-based sensor
RoHS	Fully RoHS compliant per EU Directive 2011/65/EU
Outline Dimensions	Refer to Figures 6 and 7
Process Connections	Inlet/Outlet threads: 9/16" - 18 UNF threads, Refer to Figure 6 for available process connections

Electrical



Electrical Connections	15-pin D-sub connector Analog/RS232: 15-pin D-sub connector				
Power Supply Voltage ¹	+15 Vdc + 10% or +24 Vdc + 10% Device only uses single sided power supply Inrush current: <1A				
Power Requirements	Model Device	15 Vdc		24 Vdc	
	Type	Typical (mA)	Max (mA)	Typical (mA)	Max (mA)
	4850 Controller	130	160	150	200
	4860 Meter	30	60	30	60
Analog Input / Output	0-5 Vdc or 4-20 mA				
Digital Input / Output	RS232 (Standard with all analog I/O options)				
Valve Override Signal	Valve Controller: Input Open Valve Closed: <0.3 V; open valve: >4.8 V				

Local Operator Interface (LOI)

Display	Effective display area: 28mm wide, 11mm high Display Contents: 8x2 dot matrix display
Operating Limits	Temperature 0 - 50°C Operating Humidity 5 to 95% R.H. (ambient)
Electrical Connections	2 15-pin D-sub connectors, one for the connection to the 4800 Series and one for the remote connection
Power Supply Voltage	The LOI optionally includes a wall mount power adaptor with a 3.5-mm DC-plug. The adaptor works with input voltages of AC 90-240 V/47-63Hz. The adaptor supports European, U.K., Australia and U.S. wall plugs. Power can also be supplied by a remote connection via the D-connector.
Materials of Construction	Enclosure: ABS plastic with CU-Ni plating
RoHS	Fully RoHS compliant per EU Directive 2011/65/EU
Outline Dimensions	Refer to Figure 8

¹ For high flows and/or low differential pressures (using orifices 0.049" (1.25mm) or 0.079" (2.0mm)) only 24 Vdc power is available.



4800 Series - Standard Process Connections

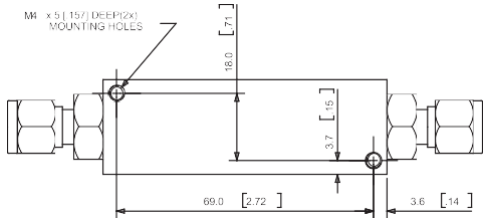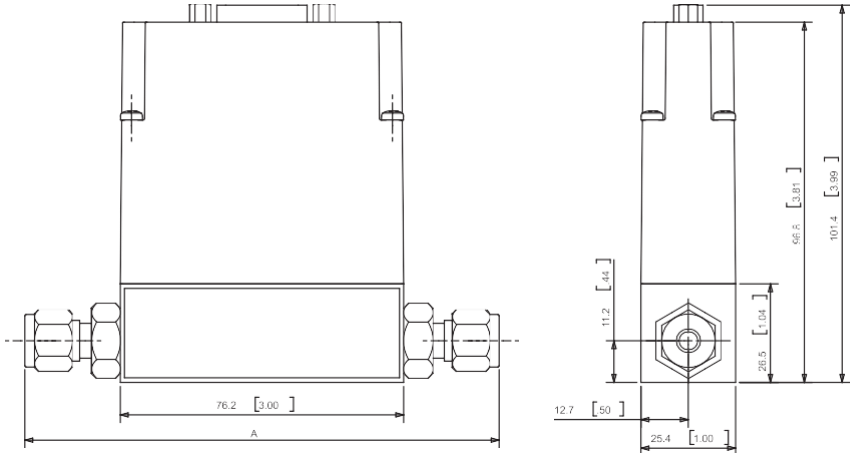


Connections	Dim A
1/4" Tube Compression	127.5 [5.02"]
1/8" Tube Compression	122.9 [4.84"]
3/8" Tube Compression	130.6 [5.14"]
1/4" VCO	115.8 [4.56"]
1/4" VCR	124.0 [4.88"]
1/4" NPT-F	116.4 [4.58"]
1/4" RC-F	116.4 [4.58"]
6mm Tube Compression	127.6 [5.02"]
10mm Tube Compression	131.0 [5.16"]
1/4" Tube Compression for 5850TR Replacement	128.8 [5.07"]

mm [inches]

4800 Series - Downport Connections

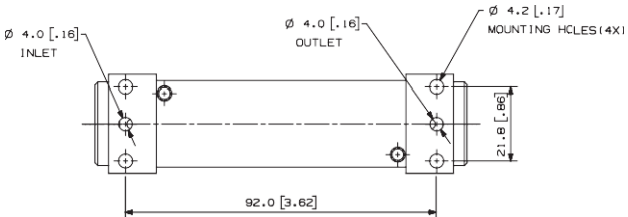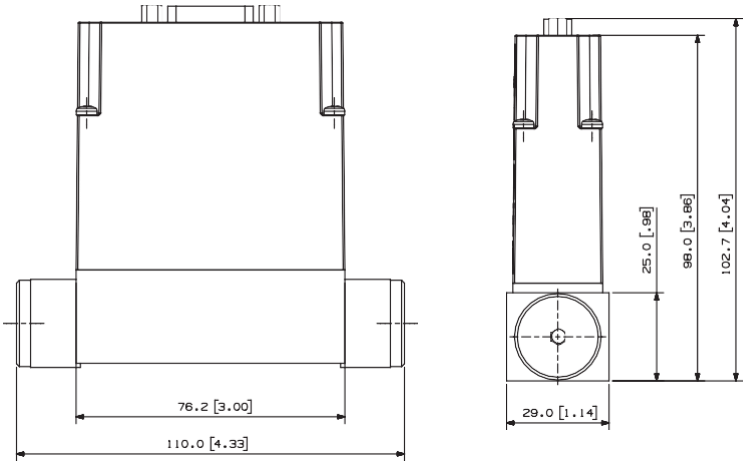


4800 Series - LOI Module

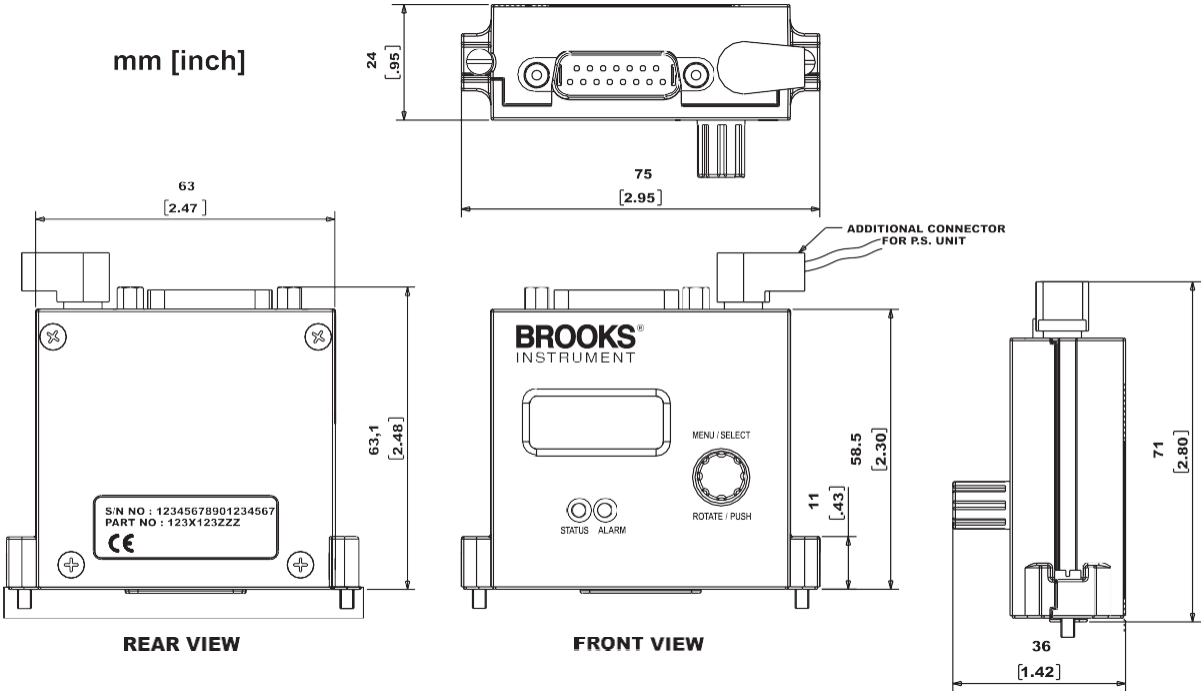

4800 Series - Pin-Out Diagram




15 Pin D-Sub Connector



Pin	4800 Series / LOI
1	Setpoint Signal Common
2	Flow Voltage Output
3	No Connection
4	Flow Current Output
5	Positive Supply Voltage
6	No Connection
7	Setpoint Current Input
8	Setpoint Voltage Input
9	Power Supply Common
10	Flow Signal Common
11	No Connection
12	Valve Override Input
13	No Connection
14	RXD
15	IXD

Product Certifications

These certifications cover the 48xx Series thermal mass flow devices as well as the Local Operator Interface (LOI).

Mark	Agency	Certification/ Marking/ Directive	Applicable Standard	Details
	CSA	Class I, Div 2 Groups A, B, C & D; T4 Class 1, Zone 2, AEx nA II T4 Ex nA II T4	UL & CSA Standards	Certificate No. 06.CSA150464
	ATEX	II 3 G Ex nA II T4	EN60079-0:2006 EN 60079-15:2005	KEMA 06ATEX0251 X
	CE	EMC Directive 2014/30/EU	EN:61326-1:2013	EMC
		RoHS Directive 2011/65/EU		RoHS
		Pressure Equipment Directive 2014/68/EU		Sound Engineering Practice (SEP)

Hazardous Location Classification

The modules shall be installed in a suitable enclosure providing a degree of protection of at least IP54 according to EN 60529, taking into account the environmental conditions under which the equipment will be used. Provisions shall be made to prevent the rated voltage from being exceeded by transient disturbances of more than 40%.

Model Code

Code Description	Code Option	Option Description			
I. Base Model Code	4850	Flow Controller, Body 0 (50 sccm - 40 slpm)			
	4860	Flow Meter, Body 0 (50 sccm - 40 slpm)			
II. Digital I/O Communications	A	RS-232 + Analog, Select applicable analog I/O			
III. Model Revision Level	B	Revision			
IV. Analog I/O, Input / Output	B	0-5 Vdc / 0-5 Vdc			
	C	4-20 mA / 4-20 mA			
	D	0-5 Vdc / 4-20 mA			
	E	4-20 mA / 0-5 Vdc			
	0	None			
V. Power Supply	1	15 Vdc			
	2	24 Vdc			
VI. Mechanical Connections	1A	9/16" -18unf straight thread			
	B1	1/4" tube compression w/filter			
	C1	1/8" tube compression w/filter			
	D1	3/8" tube compression w/filter			
	E1	1/4" VCR w/filter			
	F1	1/4" VCO w/filter			
	G1	1/4" NPT-F w/filter			
	H1	6mm tube compression w/filter			
	J1	10mm tube compression w/filter			
	S1	Downport, no O-ring cavity			
	T1	1/4" RC (BSPT) w/filter			
	X1	Downport, with O-ring cavity			
Y1	1/4" tube w/filter (5850TR replace)				
VII. Body		Body	O-Ring Seal	Seat	Valve Type
	A	316SS	Viton	None (Meter Only)	None (Meter Only)
	B	316SS	Viton	Viton	Normally Closed
VIII. Area Classification	1	Standard Location (Safe Area)			
	2	ATEX Zone 2			
	4	CSA Div 2/Zone 2 (Recognized)			
IX. Valve Orifice Size	A	No Orifice (Meter Only)			
	B	0.001 inch / 0.03mm			
	C	0.002 inch / 0.05mm			
	D	0.003 inch / 0.08mm			
	E	0.005 inch / 0.125mm			
	F	0.008 inch / 0.2mm			
	G	0.012 inch / 0.315mm			
	H	0.020 inch / 0.5mm			
	J	0.031 inch / 0.8mm			
	K	0.049 inch / 1.25mm only available with power supply option code=2 (24 Vdc)			

Code Description	Code Option	Option Description		
X. Mass Flow Restrictor Type		Type or Restrictor	Restrictor Range (sccm N₂ Equivalent @ 0°C ref)	
	A	No Restrictor	N/A	N/A
	C	Plug	0	180
	K	K	160.4	228.53
	M	M	218.4	310.6
	N	N	265.7	377.7
	P	P	332	471.6
	Q	Q	424.8	603
	R	R	554.8	787
	S	S	736.7	1044.6
	T	T	991.4	1405
	U	U	1348	1910
	V	V	1847	2617
	W	W	2546	3607
	X	X	3524	4992
	Y	Y	4894	6932
	1	1	6811	9647
	2	2	9496	13,453
3	3	13,250	18,773	
4	4	18,520	30,143	
5	5	30,100	50,143	
XI. Calibration		Calibration Condition	Accuracy	Traceability
	A	None-Uncalibrated	N/A	N/A
	B	Single Gas	±3.0% of F.S.	None
	C	Single Gas	±1.0% of F.S.	None
	E	Single Gas	±1.0% of F.S.	ICC - International Calibration Certification
XII. Accessories	0	None		
	1	LOI with Power Adapter		
	2	LOI without Power Adapter		
XIII. Certificates	0	None		
	9	Multiple Certs. Describe required certs in notes. Add all applicable changes to list price.		
	A	Declaration of Compliance 2.1 (Certificate of Conformance)		
	B	Declaration of Compliance 2.1 Leak Test		
	C	Declaration of Compliance 2.1 Pressure Test		
	D	Declaration of Compliance 2.1 Oxygen Service		
	E	Declaration of Compliance 2.1 Materials		
XIV. OEM Code	A	Standard Brooks Label		

Sample Model Code

I	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII	XIII	XIV
4850	A	B	B	1	1A	A	2	D	K	E	2	9	A

Brooks is committed to assuring all of our customers receive the optimal solution for their application, along with outstanding service and support to back it up. We operate first class repair facilities located around the world to provide rapid response and support. Each location utilizes primary standard calibration equipment to ensure accuracy and reliability for repairs and recalibration and is certified by our local Weights and Measures Authorities and traceable to the relevant International Standards.

Visit www.BrooksInstrument.com to locate the service location nearest to you.

START-UP SERVICE AND IN-SITU CALIBRATION

Brooks Instrument can provide start-up service prior to operation when required. For some process applications, where ISO-9001 Quality Certification is important, it is mandatory to verify and/or (re)calibrate the products periodically. In many cases this service can be provided under in-situ conditions, and the results will be traceable to the relevant international quality standards.

SEMINARS AND TRAINING

Brooks Instrument can provide customer seminars and dedicated training to engineers, end users, and maintenance persons. Please contact your nearest sales representative for more details. Due to Brooks Instrument's commitment to continuous improvement of our products, all specifications are subject to change without notice.



TRADEMARKS

BrooksBrooks Instrument, LLC

All other trademarks are the property of their respective owners.

Data-Sheet 4800-EN/2024-12

The logo for Contech, featuring the word 'Contech' in a bold, white, sans-serif font with a horizontal line under the 't'.

Av. Dr. Lino de Moraes Leme, 1.094
Vila Paulista – São Paulo/SP – 04360-000.
+55 11 5035-0920
Atendimento@contechind.com.br

www.contechind.com.br